

POLIFILM



**PRODUCT DEVELOPMENT
TECHNICAL CENTRE**

COMPETENCE IN FILMS

POLIFILM EXTRUSION

TECHNICAL CENTRE

BLOWN FILM FACILITY

3-layer co-extrusion,
5-layer co-extrusion and
7-layer co-extrusion
Film thickness 25 µm – 300 µm
Film width 200 mm – 320 mm

BLOWN FILM FACILITY


Single blown film extrusion
Film thickness 20 µm – 300 µm
Film width 120 mm – 240 mm

CAST FILM FACILITY

single cast film extrusion,
4-layer cast film extrusion and
5-layer cast film extrusion
Film thickness 17 µm – 100 µm
Film width 200 mm – 300 mm

RANGE OF SERVICES

Recipe development
Raw material screening
Colour settings
Setup of film equipment with additives, e.g. lubricants, anti-blocking agents,
cling additives, UV stabilisation, anti-fog equipment, flame-retardant equipment
Sample production
Customer samples up to a roll diameter of 400 mm (3" core)

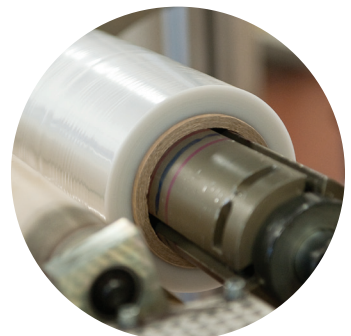

© 2016 POLIFILM